


UKF100 H

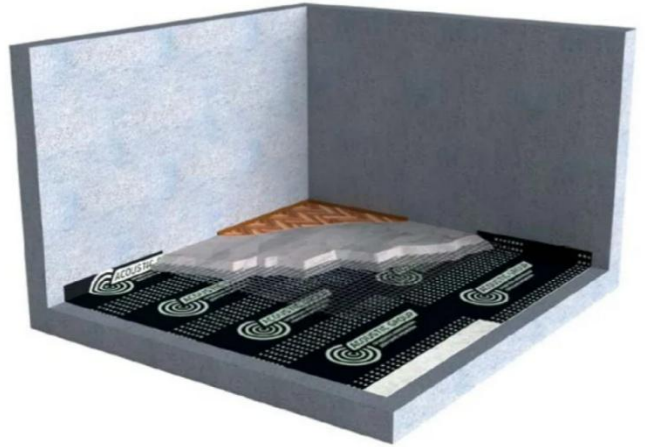

UKF100 H

Vodonepropusna membrana na bazi bitumena u sendviču sa sintetičkim filcem. Može se pored osnovne namene za zvučnu izolaciju istovremeno koristiti i kao hidro-izolacija ukoliko je neophodno (terase, toaleti, kuhinje i sl). S obzirom na odlična svojstva izolacije zvuka udara za debljinu od svega 5mm proizvod se preporučuje kao zvučna izolacija i u prostorima gde nije nužna hidro-izolacija.

Physical and technical characteristics

- roll length: 10 m
- sheet width: 1 m
- material thickness: 5 mm
- roll weight: 34 kg
- area density: 3,4 kg/m²
- dynamic rigidity factor with the load of 2 kPa: no more than 80 MN/m³
- breaking force under tension: no less than 270 N
- water resistance under pressure at least 0.2 MPa during 2 hr - absolute
- water absorbance during 24 hr: no more than 2%
- heat resistance: no less than + 85 °C


Distinctive features

- composition - polyester fiber with one-side polymeric-bituminous base
- professional waterproofing material
- high acoustic efficiency



ACOUSTIC CHARACTERISTICS

Insulation of impact noise

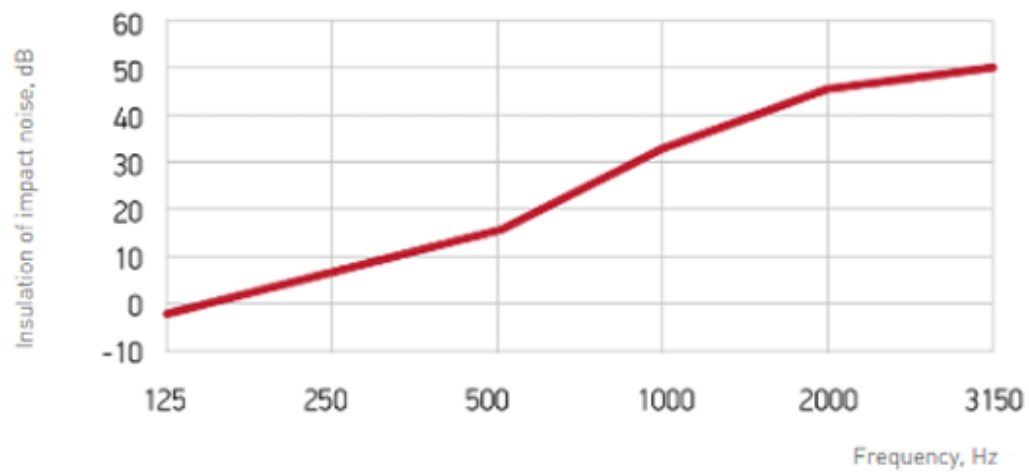

Index of impact noise decrease, ΔL_w	24 dB
--	-------